

Sandstone paint Series

厦光砂岩涂料



产品简介：

采用高分子硅丙聚合物乳液为粘剂，以天然石砂为主要展色系统研制而成，具有优异的耐候性、防水性、保色性。通过不同的施工工艺和施工工具，可创造出纹理多样的砂岩效果，赋予建筑物更具古典、高雅、自然的个性化风格。

Product features:

Polymer silicone-acrylic emulsion Binder, with natural stone to show color system developed by, with excellent weather resistance, water resistance and color retention. Through the different construction techniques and construction tools, texture a variety of sandstone effect can be created, give buildings a more personalized style of classical, elegant and natural.

性能特点：

- 逼真砂岩效果
- 憎水透气
- 色彩自然，保色性好
- 纹理自然流畅
- 弥盖细裂缝
- 抗酸雨
- 时尚、高雅、古典
- 优异的耐候性
- 纯天然材料，绿色环保

Features:

- Sandstone realistic effect
- Hydrophobic breathable
- Good color retention
- Natural and smooth texture
- Indemnity cover fine cracks
- Anti-Acid Rain
- Stylish, elegant, classic
- Excellent weathering resistance
- Natural materials, green



适用场所：

需要展现洞石效果的建筑物墙面，尤其适合别墅、排屋、中欧式建筑等高档建筑物。

Application of places:

Travertine need to show the effect of building the wall, especially for villas, townhouses, and other high buildings in the European architecture.

技术参数：

基料：丙烯酸硅共聚物乳液。
 颜色：样板、色卡或提供来样。
 产品特征：水溶性、彩色、厚质。
 干燥时间：表干12小时，重涂时间24小时，实干48小时。（温度25℃，相对湿度80%）。
 理论耗漆量：2.50~3.50kg/m²，实际视基面粗糙程度、施工方法、花型不同有所差异。

Technical parameters:

Base material: acrylic silicone emulsion polymer
 Color: model, color card or provide sample
 Product Features: Water-soluble, colored, thick quality
 Drying time: dry for 12 hours, Recoat time 24 hours work for 48 hours. (Temperature 25°C, relative humidity 80%)
 Consumption of paint: 2.00-3.00kg/m², but the actual surface roughness, construction methods and designs varied.

施工：


施工方法：批刮。
 稀释比例：一般不宜加水稀释，以免影响装饰效果。确因施工需要可酌加5%以内清水稀释。
 施工要求：在5℃~35℃及相对湿度80%以下施工。大风、下雨等恶劣天气应避免施工。

Technical parameters:

Construction methods: Scraping
 Dilution ratio: in general should not be diluted with water, so as not to affect the decorative effect. Indeed due to construction needs can be less than 5% water dilution
 Construction Requirements: 5°C ~ 35°C and relative humidity of 80% or less of construction. Wind, rain and other inclement weather construction should be avoided.

典型方案：（混批）


Typical scenario: Mixed batch




- ① 基层：厦光中层柔性腻子/厦光专用中层腻子2-3道
- ② 底层：厦光含沙专用底漆1道
- ③ 主材：厦光砂岩涂料2道
- ④ 罩面：厦光罩面涂料1-2道
- ⑤ Grassroots: Middle flexible putty / Ha light dedicated middle putty 2 - 3
- ⑥ Bottom: Sediments-specific primer 1
- ⑦ Main material: Imitation Travertine paint 2
- ⑧ Overlay: Overlay coatings 1-2 road

典型方案：（手绘）

Typical scenario: Hand-painted



- ① 基层：厦光中层柔性腻子/厦光专用中层腻子2-3道
- ② 底层：厦光含沙专用底漆1道
- ③ 主材：厦光砂岩涂料2道
- ④ 副材：厦光砂岩涂料副料1-2道
- ⑤ 罩面：厦光罩面涂料1-2道
- ⑥ Grassroots: Middle flexible putty / Ha light dedicated middle putty 2 - 3
- ⑦ Bottom: Sediments-specific primer 1
- ⑧ Main material: Imitation Travertine paint 2
- ⑨ Deputly material: 1-2 channel sandstone paint Vice materials
- ⑩ Overlay: Overlay coatings 1-2 road

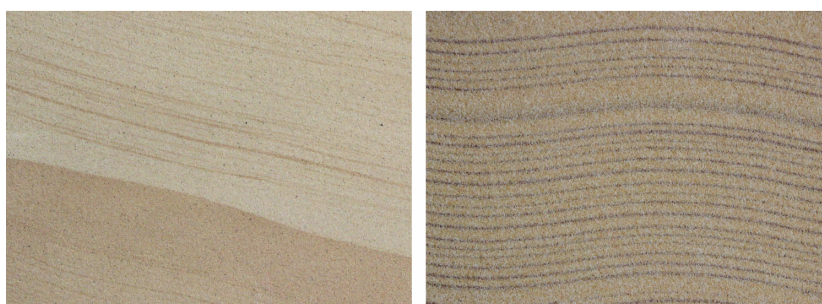

※ 该资料真实反映了本公司现有的产品及相关技术知识，仅对您的实践工作提供可能的建议，在公司完善和提高其产品技术结构和专业技术水平后，将及时改进现有产品技术标准。由于我们无法预知最终用户实际状况产生的各种变化，故此声明：公司不承担和承担与该资料使用的有任何责任，同时，厦光公司拥有所有版本资料之解释权。